


PRODUCT SPECIFICATION FOR F/FTP CAT7

Cross Section:

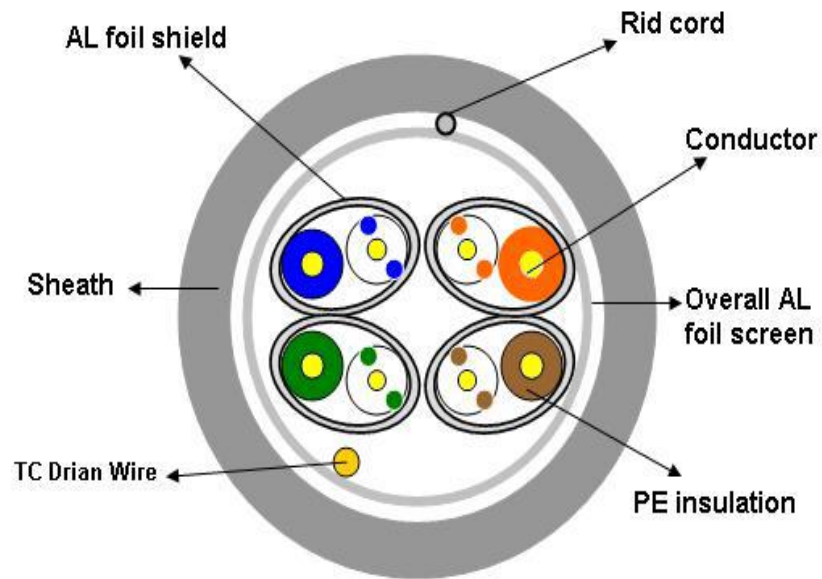

Insulation
 Cores: Pairs
 1P:Blue & White/Blue
 2P:Orange & White/Orange
 3P:Green & White/Green
 4P:Brown & White/Brown

PRODUCT SPECIFICATION:

UNIRISING CABLE

Description:	
Rated Temperature (°C)	70
Application	Telephone and other communication circuits such as voice, data, and audio for on-premise customer systems.
Reference Standard	FLUKE LINK 90m
Construction:	
Conductor	4 Twisted Pairs Bare Copper
Stranded Dia. (mm)	0.58±0.005
AWG	23
Insulation	SKIN-FOAM-SKIN PE
Nom. Thickness (mm)	0.40±0.1
Insulation Dia. (±0.05mm)	1.38±0.005
Shield	4 * Al
Overlap(%)	≥25
Shield	AL
Coverage(%)	≥100
Drain wire	0.40TC
Rip cord	As you like
Jacket	PVC
Nom. Thickness(mm)	0.55±0.1
Outer Dia. (mm)	7.5±0.4